

Application Serial No.: 10/519,881

Filing Date: December 30, 2004

Assignee: ARKRAY, Inc.

Title of the Invention: METHOD OF SETTING LANCING MEMBER TO
LANCING DEVICE, LANCING DEVICE, AND CAM MECHANISM

DECLARATION

I, Natsuko Tosa, hereby declare:


that I am a translator belonging to KYOWEY INT'L of
2-32-1301 Tamatsukuri-Motomachi, Tennoji-ku, Osaka, 543-0014
Japan;

that I am well acquainted with both the Japanese and English
languages;

that the attached document is a true translation of
Japanese Patent Application No. 2002-193846 to the best of my
knowledge and belief.

I also declare that all statements made herein of my
knowledge are true and that all statements made on information
and belief are believed to be true; and further that these
statements were made with the knowledge that willful false
statements and the like so made are punishable by fine or
imprisonment, or both, under Section 1001 of Title 18 of the
United States Code, and that such willful false statements may
jeopardize the validity of the application, any patent issuing
thereon, or any patent to which this verified statements is
directed.

Dated September 26, 2008

A handwritten signature in black ink, appearing to be 'Natsuko Tosa', written over a horizontal line.

Signature

Natsuko Tosa

| | |
|--------------------------|--|
| 【Name of Document】 | Patent Application |
| 【Reference Number】 | P14-217702 |
| 【Filing Date】 | July 2, 2002 |
| 【Receiving Office】 | Commissioner of Patent |
| Office | |
| 【IPC】 | G01N 33/48 |
| 【Title of the Invention】 | METHOD OF SETTING LANCING MEMBER TO LANCING DEVICE, LANCING DEVICE, AND CAM MECHANISM |
| 【Number of Claims】 | 9 |
| 【Inventor】 | |
| 【Address】 | 57, Nishiaketa-cho, Higashikujo, Minami-ku, Kyoto-shi, Kyoto 601-8045 Japan |
| 【Name】 | Tetsuya Sakata |
| 【Inventor】 | |
| 【Address】 | 57, Nishiaketa-cho, Higashikujo, Minami-ku, Kyoto-shi, Kyoto 601-8045 Japan |
| 【Name】 | Daisuke Matsumoto |

【Applicant】

【Identification Number】 000141897

【Address】 57, Nishiaketa-cho,
Higashikujo, Minami-ku,
Kyoto-shi, Kyoto 601-8045
Japan

【Name】 ARKRAY, Inc.

【Attorney】

【Identification Number】 100086380

【Patent Attorney】

【Name】 Minoru Yoshida

【Telephone Number】 06-6764-6664

【Attorney】

【Identification Number】 100103078

【Patent Attorney】

【Name】 Tatsuya Tanaka

【Attorney】

【Identification Number】 100105832

【Patent Attorney】

【Name】 Yoshikazu Fukumoto

【Attorney】

【Identification Number】 100117167

【Patent Attorney】

【Name】 Takashi Shiotani

【Attorney】

【Identification Number】 100117178

【Patent Attorney】

【Name】 Hiroshi Furusawa

【Charge】

【Deposit Number】 024198

【Amount of Payment】 21000

【Attached Documents】

【Name of Document】 Specification 1

【Name of Document】 Abstract 1

【Name of Document】 Drawings 1

【Identification of
General Power of

Attorney】 0103432

【Proof】 necessary

【Identification of the Document】SPECIFICATION

【Title of the Invention】

METHOD OF SETTING LANCING MEMBER TO LANCING DEVICE,
LANCING DEVICE, AND CAM MECHANISM

【Claims】

【Claim 1】

A method of setting a lancing member to a lancing device,
the method comprising:

a step for causing a lancing member formed integral with
or separately from a cap covering a needle to be held by
a holder of a lancing device, while exposing the needle
by detaching the cap from the lancing member;

wherein the lancing device is provided with a rotating
means for rotating the lancing member, and

wherein a boundary between the cap and the lancing member
is broken by rotating the lancing member relative to the
cap utilizing the rotating means, when the lancing member
is about to be held by the holder or after the lancing
member is held by the holder.

【Claim 2】

The method according to claim 1, wherein the lancing
device comprises a housing including a tip end formed with
an opening, the holder being reciprocally movable in the
housing, and

wherein the rotating means rotates the holder and the
lancing member utilizing a pressing force exerted when

the holder is pressed into the housing by the lancing member.

【Claim 3】

The method according to claim 2, wherein the lancing member is held by a supporting member including a sheath, before setting the lancing member formed integral with the cap, and

wherein the sheath is slidably fitted to an end of the housing, so that the lancing member is pressed against the holder to be pushed into the housing.

【Claim 4】

A lancing device comprising:

a holder for holding a lancing member;

a moving mechanism for advancing the holder in a predetermined direction; and

rotating means for rotating the lancing member when the lancing member is about to be held by the holder or after the lancing member is held by the holder.

【Claim 5】

The lancing device according to claim 4, wherein the holder holds the lancing member in a manner such that the holder and the lancing member are not rotatable relative to each other, the rotating means rotating the holder.

【Claim 6】

The lancing device according to claim 5, wherein the rotating means comprises a cam mechanism for rotating the holder when the holder retracts.

【Claim 7】

The lancing device according to claim 6, further comprising a cylindrical housing that contains the holder therein and includes a tip end formed with an opening at front side of traveling direction of the holder, wherein the cam mechanism includes a first groove which is provided at one of the housing and the holder and is inclined relative to a longitudinal axis of the housing, and also includes a protrusion which is provided at the other one of the housing and the holder and is fitted in the first groove.

【Claim 8】

The lancing device according to claim 7, wherein the cam mechanism further includes a second groove connected to the first groove and extending in parallel to the axis of the housing, and the protrusion passing through the second groove when the holder advances.

【Claim 9】

A cam mechanism comprising:

a cylindrical housing;

a movable member contained in the housing for moving reciprocally in first and second directions parallel to a longitudinal axis of the housing, the movable member being rotated when moving in the first direction, not rotated when moving in the second direction;

a first groove inclined relative to the axis of the housing and a second groove connected to the first groove

and extending linearly in parallel to the axis of the housing, the first and the second grooves being provided at one of the housing and the movable member; and a protrusion provided at the other one of the housing and the movable member, the protrusion extending into the first groove and the second groove; wherein the protrusion moves in the first groove when the movable member moves in the first direction, and moves in the second groove when the movable member moves in the second direction.

【Detailed Description of the Invention】

【0001】

【Field of the Invention】

The present invention relates to a technique for simply and properly setting lancing member to a lancing device to sample body fluid such as blood.

【0002】

【Prior Art】

Lancing devices are used by diabetics for sampling blood to measure the blood-sugar level. Such a lancing device generally comprises a cylindrical housing and a lancet holder reciprocally movable in the housing. A disposable lancet is held in the lancet holder, and then the front end of the housing is pressed onto the skin. Thereafter, the lancet holder is advanced to pierce the skin by the needle of the lancet. In this way, the skin bleeds and blood can be sampled.

【0003】

A conventional lancet, disclosed in JP-A-H6-133955, is shown in Fig. 17. The illustrated lancet 9 includes a metal needle 91 which is supported by a body 90 made of synthetic resin. The body 90 is integrally formed by resin molding with a cap 92 for covering a tip end of the needle 91. The boundary 93 between the cap 92 and the body 90 is a narrow portion.

【0004】

The needle 91 of the lancet 9 is covered by the cap 92, so that the needle 91 unused is kept clean. The cap 92 is twisted to break the boundary 93 to detach the cap 92 and the body 90, so that the needle 91 is exposed while being set to the lancing device.

【0005】

【Problems to be Solved】

However, in the prior art, the setting of the lancet 9 to the lancing device is performed after the cap 92 is detached from the lancet 9, in a manner such that the separated lancet 9 is attached to a lancet holder of the lancing device. In this way, unfavorably, the exposed needle 91 of the lancet 9 may prick a finger of the user during the setting operation.

【0006】

A solution to this problem may be detaching the cap 92 from the lancet 9 after the lancet 9 is attached to the lancet holder of the lancing device. However, even in

this manner, the user still needs to pinch the cap 92 and twist it for breaking the boundary 93. Unfavorably, this task is troublesome. Moreover, a typical lancet-setting operation with respect to a lancing device may entail appropriate pushing of the lancet or lancet holder into the housing of the lancing device. In such a case, the setting of the lancet 9 can be more troublesome.

【0007】

The present invention has been conceived under such circumstances, and thus an object of the present invention is to provide a method of properly setting lancing member in lancing device by simple operation, as well as a lancing device for preventing a needle of the lancing member from pricking a user's finger. Further, another object of the present invention is to provide a cam mechanism for being used in such lancing device.

【0008】

【Means for Solving the Problems】

To obtain the above objects, the present invention provides the following technical art.

【0009】

According to a first aspect of the present invention, there is provided a method of setting a lancing member to a lancing device, the method comprising:
a step for causing a lancing member formed integral with or separately from a cap covering a needle to be held by a holder of a lancing device, while exposing the needle

by detaching the cap from the lancing member; wherein the lancing device is provided with a rotating means for rotating the lancing member, and wherein a boundary between the cap and the lancing member is broken by rotating the lancing member relative to the cap utilizing the rotating means, when the lancing member is about to be held by the holder or after the lancing member is held by the holder.

【0010】

With such structure, since the cap is separated from the lancing member by rotating the lancing member relative to the cap utilizing the rotating means provided at the lancing device, differently from the prior art, there is no need that the user bothers twisting the cap which may be designed not to twist. Thus, setting of the lancing member is facilitated more than the prior art. Further, since the cap is separated from the lancing member when the lancing member is about to be held by the holder or after the lancing member is held by the holder, differently from the prior art in which the needle is exposed before setting the lancing member to the lancing device, the needle is prevented from pricking the user's finger.

【0011】

Preferably, the lancing device comprises a housing including a tip end formed with an opening, the holder being reciprocally movable in the housing, and wherein

the rotating means rotates the holder and the lancing member utilizing a pressing force exerted when the holder is pressed into the housing by the lancing member. With such structure, since the holder is pressed into the housing by the lancing member so that the cap is separated from the lancing member by rotating the lancing member relative to the cap, setting of the lancing member is further facilitated.

【0012】

Preferably, the lancing member is held by a supporting member including a sheath, before setting the lancing member formed integral with the cap, and wherein the sheath is slidably fitted to an end of the housing, so that the lancing member is pressed against the holder to be pushed into the housing. With such structure, since setting of the lancing member to the lancing device is properly performed by a simple operation of slidably fitting the supporting member to an end of the housing, there is no need that the user bothers holding the cap. The sheath may be a rectangular parallelepiped, other than a cylinder. Preferably, the supporting member or the cap may be provided with a stopper for stopping the rotation of the supporting member or the cap, by being engaged with the housing, when the lancing member is pressed against the holder to be pushed into the housing.

【0013】

According to a second aspect of the present invention, there is provided a lancing device comprising: a holder for holding a lancing member; a moving mechanism for advancing the holder in a predetermined direction; and rotating means for rotating the lancing member when the lancing member is about to be held by the holder or after the lancing member is held by the holder.

【0014】

With such structure, the method of setting of the lancing member to the lancing device, provided according to the first aspect of the present invention, is properly performed, and also obtains an effect as described above.

【0015】

Preferably, the holder holds the lancing member in a manner such that the holder and the lancing member are not rotatable relative to each other, the rotating means rotating the holder. With such structure, the lancing member held in the holder is properly rotated by rotating the holder.

【0016】

Preferably, the rotating means comprises a cam mechanism for rotating the holder when the holder retracts. With such structure, the holder is rotated without utilizing a driving means such as a motor, which is preferable to save the product cost and running cost of the lancing device.

【0017】

Preferably, the lancing device further comprises a cylindrical housing that contains the holder therein and includes a tip end formed with an opening at front side of traveling direction of the holder, wherein the cam mechanism includes a first groove which is provided at one of the housing and the holder and is inclined relative to a longitudinal axis of the housing, and also includes a protrusion which is provided at the other one of the housing and the holder and is fitted in the first groove. With such structure, when the protrusion moves in the first groove, the holder rotates, thereby performing a simple rotation of the holder, which is the object of the present invention.

【0018】

Preferably, the cam mechanism further includes a second groove connected to the first groove and extending in parallel to the axis of the housing, and the protrusion passing through the second groove when the holder advances. With such structure, when the holder is moved forward in order to prick human skin with the needle of the lancing member, the holder properly advances due to the guiding function of the second groove and the protrusion.

【0019】

According to a third aspect of the present invention, there is provided a cam mechanism comprises a cylindrical housing; a movable member contained in the housing for

moving reciprocally in first and second directions parallel to a longitudinal axis of the housing, the movable member being rotated when moving in the first direction, not rotated when moving in the second direction; a first groove inclined relative to the axis of the housing and a second groove connected to the first groove and extending linearly in parallel to the axis of the housing, the first and the second grooves being provided at one of the housing and the movable member; and a protrusion provided at the other one of the housing and the movable member, the protrusion extending into the first groove and the second groove; wherein the protrusion moves in the first groove when the movable member moves in the first direction, and moves in the second groove when the movable member moves in the second direction.

【0020】

Such structure enables a simple operation where the movable member is not rotated when moving forward, but rotated when moving backward. Thus, the cam mechanism is suitable for rotating the holder for holding the lancing member, in the method of setting the lancing member to the lancing device and the lancing device provided according to the first and second aspects of the present invention.

【0021】

Other features and advantages of the present invention will be apparent from the following description of the embodiments according to the present invention.

【0022】

【Mode for Carrying out the Invention】

Preferred embodiments according to the present invention will be described below with reference to the drawings.

【0023】

Figs. 1-6 illustrate an example of a lancing unit used for a method of setting a lancing member in a lancing device according to the present invention. For facilitating the understanding of the present invention, the lancing unit is described first.

【0024】

As shown in Fig. 1 and Fig. 2, the lancing unit U includes a case 1, a lancet 2, a cap 29, and a sensor holder 3.

【0025】

The case 1, in the form of a cap made of e.g. synthetic resin, includes a cylindrical sheath 10, which is formed with an opening 12 at one end (upper end), and also includes a bottom 11 which is formed integral with the sheath 10 at the other end (lower end). The case 1 is an example of a 'supporting member including a sheath' according to the present invention. As will be described later, the case 1 is externally fixed to a predetermined portion of a lancing device A, and the sheath 10 is internally formed with a stopper 13 for preventing

rotation of the case 1 in the lancing device. The opening 12 of the case 1 is closed by a film 14 serving as a lid attached to the top of the case, so that the case 1 is hermetically sealed. The film 14 is made of aluminum foil or laminated film of aluminum foil and resin film, for example.

【0026】

As shown in Fig. 3, the lancet 2 includes a synthetic resin body 20 and a metal needle 21 held by the synthetic resin body 20 with its tip end protruding out of the synthetic resin body 20. The body 20 is formed with a plurality of ribs 22 extending in parallel to the needle 21, and with a groove 23, so that it can be properly attached to a lancet holder 5 of the lancing device A.

【0027】

The cap 29, formed by resin molding, is integral with the body 20 to cover the tip end of the needle 21, and extends in the longitudinal direction of the needle 21 below the tip end (bottom end) of the body 20. The boundary 28 between the cap 29 and the body 20 is formed narrower than the other portions to facilitate the detaching of the cap and the body. As shown in Fig. 6, the cap 29 includes a bottom end formed with a hole 29a into which a protrusion 15 formed on the bottom 11 of the case 1 is fitted. Thus, the cap 29 is held vertically in the case 1. Contrary to the above structure, the case 1 may have a recess formed at the bottom 11, while the cap 29 may have a protrusion

formed at its bottom to be fitted into the recess. The cap 29 is fixed to the case 1 by an adhesive for reliable attachment to the case 1. For this fixation, the adhesive may be replaced with ultrasonic welding or heat welding, for example. This may also apply to attachment of other parts of the lancing unit. The needle 21 of the lancet 2 is sterilized by e.g. gamma irradiation before being arranged in the case 1. Preferably, the case 1 is provided with a drying agent (not shown) for quality protection of a sensor S which will be described later. According to the present invention, the cap 29 and the body 20 may be integrally formed with the case 1, in place of being formed separately.

【0028】

The sensor holder 3 holds a sensor S used for blood analysis. The sensor holder 3 is made of synthetic resin, and as shown in Fig. 4, includes a side wall 31 which is arcuate in section and a horizontal wall 32 which is integrally formed with the side wall 31. The horizontal wall 32 includes an inclined underside to which the sensor S is attached.

【0029】

The sensor S is in the form of a chip and may have a structure shown in Fig. 5. Specifically the sensor S includes a base plate 390 having an upper surface provided with a reagent 39a and a pair of electrodes 39b, where the reagent contains an enzyme reactive to the glucose

in blood in a certain way (e.g. oxidation), and the electrodes electrically detect the reaction. On the base plate 390, a capillary 393 is formed by two separate spacers 391 and a cover 392 which is stacked on the spacers 391. The assembly of the base plate 390, spacers 391 and cover 392 is formed with a recess 394 as an inlet of blood. When supplied to the recess 394, the blood flows through the capillary 393 by capillary action, to be led to the reagent 39a.

[0030]

As shown in Fig. 4, the horizontal wall 32 of the sensor holder 3 is formed with a pair of through-holes 32a and a pair of supporting wall portions 32b. The through-holes 32a permit insertion of a pair of probes 62 of a lancing device A, so that the probes 62 come into contact with the electrodes 39b of the sensor S. The supporting portions 32b can be externally pressed onto the bottom portion 29b of the cap 29 in a sandwiching manner. The bottom portion 29b of the cap 29 may be cylindrical, while the supporting wall portions 32b are substantially arcuate correspondingly to the outer circumference of the cap's bottom portion. As shown in Figs. 1 and 2, since the wall portions 32b are externally fixed to the bottom portion of the cap 29, the sensor holder 3 is supported by the case 1 via the cap 29. It should be noted here that the sensor holder 3 is slidable and detachable relative to the cap 29.

【0031】

As the case 1 of the lancing unit U is sealed by the film 14, the reagent 39a of the sensor S is kept free from moisture, thereby preventing quality deterioration in the short term. Further, the needle 21 of the lancet 2 is covered by the cap 29, and the cap 29 is integrally formed with the body 20 of the lancet 2. Due to such highly hermetical sealing, the lancet 2 is kept free from contamination even before the lancet 2 is set in the case 1.

【0032】

To assemble the lancing unit U, the lancet 2 integral with the cap 29 is set in the case 1, and then the sensor holder 3 is attached to the cap 29. Next, the film 14 is provided to cover the opening 12 of the case 1. The setting of the lancet 2 is performed by fixing the protrusion 15 of the case 1 into the hole 29a of the cap 29, the setting of the sensor holder 3 is performed by externally fitting the supporting portions 32b to the cap 29. In this manner, it is easy to assemble the lancing unit U, whereby the production costs are lowered.

【0033】

Figs. 7-16 illustrate an example of a lancing device according to the present invention.

【0034】

As shown in Fig. 7, the lancing device A of the present embodiment includes a housing 4, a lancet holder 5, a

latch 59, a cam mechanism C, and other components to be described below.

【0035】

The housing 4 includes three sleeves 40a-40c which are serially connected to each other, each serving as a front portion, an intermediate portion, and a rear portion, the housing being held by an outer case 70. The tip end (bottom end) of the sleeve 40a, formed with an opening 41, is brought into contact with human skin. As shown in Fig. 11, the sleeve 40a is formed and sized to be slidably fitted with the case 1 of the lancing unit U. The sleeve 40a is externally formed with a groove 42 into which the stopper 13 of the case 1 is fitted. The groove 42 extends lengthwise of the sleeve 40a to prevent the case 1 from rotating when the case 1 is externally fitted to the sleeve 40a. When the lancet 2 and the sensor holder 3 of the lancing unit U are set to the lancing device A, the case 1 is brought into sliding engagement with the sleeve 40a, so that the lancet 2 and the sensor holder 3 are properly arranged at predetermined positions in the lancing device A as described later.

【0036】

As shown in Fig. 8, the sleeve 40a is provided with a holding portion 6. The holding portion 6 serves to hold the sensor holder 3 of the lancing unit U and includes an attachment 60 fixed to the sleeve 40a. The attachment is made of synthetic resin and includes a space 60a formed

by first and second walls 60b, 60c. As shown in Fig. 12 and 13, the space 60a permits the insertion, from its bottom side, of the side wall 31 of the sensor holder 3 of the lancing unit U. The holding portion 6 is provided with a spring 61. When the side wall 31 of the sensor holder 3 is inserted into the space 60a, the spring 61 exerts urging force F which presses the side wall 31 toward the second wall 60c, or toward the center of the sleeve 40a, whereby the sensor holder 3 is held by the holding portion. For holding the sensor holder 3 more reliably, use may be made of appropriate engaging means which can come into releasable engagement with the sensor holder 3 and the holding portion 6.

【0037】

As shown in Fig. 13, a width s1 of the space 60a is larger than the thickness t1 of the side wall 31 of the sensor holder 3. With such an arrangement, when the side wall 31 is inserted into the space 60a, with the sensor holder 3 set in the case 1, there is a space 60a' formed between the side wall 31 and the second wall 60c. Thus, as shown in Fig. 14, when the sensor holder 3 is released from the cap 29, the urging force F of the spring 61 presses the side wall 31 of the sensor holder 3 onto the second wall 60c.

【0038】

In Figs. 7 and 8, a pair of probes 62 is held by the second wall 60c of the holding portion 6. The probes 62,

extending in the longitudinal direction of the housing 4, come into contact with the electrodes 39b of the sensor S. Each probe 62 includes a retractable tip end 62a. When the sensor holder 3 is not attached to the lancing device A, each tip end extends downwardly by urging force of a suitable spring (not shown). On the other hand, as shown in Figs. 12-14, when the sensor holder 3 is attached to the holding portion 6, the tip end 62a is pressed upwardly by the sensor S and retracts. Though not shown, the outer case 70 is provided with a control circuit electrically connected to the probes 62. The control circuit includes a CPU and attached memory, for example, for calculating glucose level in blood introduced to the reagent 39a, based on an electric current measured by the probes 62.

【0039】

The lancet holder 5 for holding and moving the lancet 2 is an example of a holder (for holding a lancing member). The lancet holder 5 is rotatably inserted in the sleeve 40b, while also being slidable in the longitudinal direction of the sleeve. The lancing holder 5 includes a bottom portion formed with a recess 50. The recess 50 permits the insertion of the body 20 of the lancet 2, so that the lancing holder 5 removably holds the lancet 2.

【0040】

The recess 50 is internally formed with a plurality of grooves 50a in which the ribs 22 of the body 20 of the

lancet 2 are fitted in. Due to this structure, the body 20 and the lancet holder 5 are prevented from rotating relatively when the body 20 of the lancet 2 is inserted in the recess 50. It should be noted that either of the grooves 50a and the ribs 22 is partially or wholly formed in spirals. Thus, when the body 20 of the lancet 2 is inserted in the recess 50, as will be described later, the body 20 and the lancet holder 5 rotate in a predetermined direction through a relatively small angle.

【0041】

The cam mechanism C is made up of the lancet holder 5 and the housing 4. Specifically, as shown in Fig. 9, the lancet holder 5 includes a head portion 51 which is circumferentially formed with a plurality of protrusions 52 at an equal angular spacing. The protrusions 52 are inserted into and guided by first grooves and second grooves 43A, 43B which are internally formed in the sleeve 40b of the housing 4. The lancet holder 5 is an example of a moving portion of a cam mechanism according to the present invention.

【0042】

The first grooves 43A are inclined relative to the longitudinal axis of the sleeve 40b for rotating the lancet holder 5 when the lancet holder 5 is pushed upward by the lancet 2 of the lancing unit U. On the other hand, the second grooves 43B extend in parallel to the axis of

the sleeve 40b for guiding the lancet 2 and the lancet holder 5 linearly toward the tip end of the housing 4 to pierce human skin by the lancet 2.

【0043】

Figs. 10(a)-10(e) show part of the first and the second grooves 43A, 43B expanded in a plane, where these grooves are connected to each other (in the figures, areas other than the first and second grooves 43A, 43B are indicated by hatching). As shown in Fig. 10(a), the first and second grooves include ends (bottom ends) 43A', 43B' which are arranged circumferentially of the housing 4 and connected to each other so that the total width s4 is relatively large. On the other hand, the other ends (top ends) 43A'', 43B'' of the first and the second grooves are connected to each other in a manner such that the end 43B'' projects beyond the end 43A'' by an appropriate distance s5. When the lancet holder 5 is moved in the longitudinal direction of the housing 4, the protrusions 52 are guided along the first and second grooves 43A, 43B. The movement will be specifically described later.

【0044】

As shown in Figs. 7 and 8, the latch 59 is connected to the top of the lancet holder 5, and slidably inserted in the housing 4. A bushing 58 is non-rotatably fitted into the bottom of the latch 59A. The top of the lancet holder 5 is formed with a plurality of claws 53 to be rotatably inserted in the bushing 58. With such arrangements, the

lancet holder 5 is rotatable, whereas the latch 59 does not rotate together with the lancet holder. The top of each claw 53 comes into non-extractable engagement with the top of the bushing 58 for connection of the lancet holder 5 and the latch 59.

【0045】

The latch 59 is formed with a pair of claws 59a at the top. Each of the claws 59a comes into engagement with an end of one of the cutouts 44 formed at the sleeve 40c. As will be described below, the engagement is established when the lancet holder 5 and the latch 59 are pressed upwardly by the lancet 2 of the lancing unit U. The sleeve 40c is provided, at the top, with a latch-releasing pusher 71 and an operating cap 72 connected to the pusher. A spring 73 is provided between the pusher 71 and an intermediate wall 59b of the latch 59. The spring 73 is a compressed coil spring, for example. The operating cap 72 is slidable relative to the sleeve 40c in the longitudinal direction of the sleeve. When the cap 72 is pressed downward against the spring 73, the pusher 71 moves downward to press the latch claws 59a. In this way, as shown in Fig. 16, the claws 59a are forcibly disengaged from the ends of the cutouts 44, whereby the latch 59 and the lancet holder 5 are advanced downward due to the restoring force of the compressed spring 73. The housing 4 is internally provided with a return spring 74 for

moving the lancet holder 5 and the latch 59 back after they have advanced.

【0046】

A method of setting the lancet 2 to the lancing device A and the workings of the lancing device A are now described below.

【0047】

First, as shown in Fig. 11, the case 1 of the lancing unit U is externally fitted to the sleeve 40a of the lancing device A. Before this step, the film 14 is removed from the case 1 to open the opening 12. When the case 1 is externally fitted to the sleeve 40a, the body 20 of the lancet 2 is fitted into the recess 50 of the lancet holder 5 to be held at the lancet holder 5. Then the case 1 is pressed upwardly in the direction of an arrow N1, whereby the lancet holder 5 is pressed upwardly by the lancet 2. In this step, the lancet holder 5 and the body 20 of the lancet 2 rotate in the direction of an arrow N2, until the boundary 28 of the lancet 2 and the cap 20 is twisted to be broken.

【0048】

More specifically, as shown in Fig. 10(a), the protrusions 52 of the lancet holder 5 are initially placed within the end 43B' of the second groove 43B. When the lancet 2 is fitted into the recess 50, each protrusion is moved to the end 43A' of the groove 43A, as indicated by an arrow N3 in Fig. 10(b). This movement is caused

by the rotation of the lancet holder 5 when the body 20 is fitted in the recess 50, because of the spiral form of either the ribs 22 in the body 20 of the lancet 2 or the grooves 50a in the recess 50 of the lancet holder 5. While the lancet holder 5 is being pressed upwardly by the lancet 2, the protrusions 52 move within the first grooves 43A, as shown in Figs. 10(c) and 10(d). Due to this movement, the lancet holder 5 rotates together with the body 20 of the lancet 2. On the other hand, the cap 29 of the lancing unit U is fixed to the case 1 non-rotatably. Thus, the boundary 28 between the body 20 of the lancet 2 is twisted and then breaks.

【0049】

As shown in Fig. 10(d), the protrusion 52 enters the top end 43B" upon arriving at the second groove 43B. As already described, the top end 43B" projects beyond the top end 43A" by a predetermined distance, so that the protrusion 52 guided to the projecting end is prevented from swinging circumferentially in the housing 4. As a result, the lancet holder 5 can be held stable.

【0050】

The first groove 43A has an inclined angle θ (see Fig. 10(d)) which may be enlarged to reduce the force necessary to press the lancet 2 for rotating the lancet holder 5. In this state, however, the lancet 2 needs to be pressed for a longer distance until the lancet holder 5 is rotated through the desired angle. Thus, in designing the cam

mechanism C, preferably the inclined angle θ is determined so that the lancet holder 5 can be rotated through an appropriate angle to twist the cap 29 off the body 20 of the lancet 2 without compromising the rotational operability of the lancet holder 5.

【0051】

According to the present embodiment, the case 1 is non-rotatable relative to the housing 4 when the case 1 as a whole is externally fitted to the housing. However, the present invention is not limited to this. In the present invention, for example, the stopper 13 of the case 1 may pass through the groove 42 of the housing 4 after the protrusion 52 arrives at the portion shown in Fig. 10(d), so that the case 1 can rotate relative to the housing 4. In this way, even if the boundary 28 between the body 20 of the lancet 2 and the cap 29 is not completely broken by rotation of the lancet holder 5, the user can rotate the case 1 to break the boundary 28.

【0052】

When the case 1 is pressed upward for an appropriate distance, as shown in Fig. 12, the latch 59 is moved upward and each claw 59a is brought into engagement with the end of the cutout 44, whereby the latch 59 is latched. When the case 1 is pressed upward, as shown in Fig. 13, the side wall 31 of the sensor holder 3 is inserted into the space 60a of the holding portion 6, to receive urging force F of the spring 61. The sensor holder 3 maintains

its position against the urging force F while being held by the cap 29, whereby the space 60a' is maintained between the second wall 60c and the side wall 31. The tip ends 62a of the probes 62 are pressed upward by the sensor S and come into contact with the electrodes 39b of the sensor S , while resisting the pressing force. Thus, the probes 62 and the electrodes 39b are held in reliable connection.

[0053]

After completing the pressing-up step of the case 1, as shown in Fig. 14, the case 1 is removed downward from the sleeve 40a. As already described, the boundary 28 between the body 20 of the lancet 2 and the cap 29 has been broken by the twisting, whereby the lancet 2 and the cap 29 are properly divided. Due to this division, the lancet 2 is held by the lancet holder 5 with the needle 21 exposed. On the other hand, the cap 29 remains fixed to the case 1. The sensor holder 3 is detached from the cap 29 to be held by the holding portion 6. In this way, the lancing device A enables to attach the lancet 2 to the lancet holder 5, to rotate the lancet holder 5, to latch the latch 59, to remove the cap 29 from the body 20, and to set the sensor holder 3 to the holding portion 6, by simple sliding operation of externally fitting and removing the case 1 to the sleeve 40a. Here, the cap 29 remains fixed to the case 1. Thus, the disposal thereof is easy.

【0054】

After the case 1 is removed from the sleeve 40a and the sensor holder 3 is divided from the cap 29, the side wall 31 of the sensor holder 3 is pressed against the second wall 60c by the urging force F of the spring 61. In such an instance, the sensor holder 3 is moved toward the center of the sleeve 40a (in direction of an arrow N4 in Fig. 14) by the size of the space 60a' shown in Fig. 13. Such movement of the sensor holder 3 makes the sensor S closer to the lancing portion of the lancet 2, which is advantageous in the point to be described later.

【0055】

After the attaching process of the lancet 2 and the sensor 3 to the lancing device A, the tip end of the sleeve 40a of the lancing device A is pressed against human skin 99 to be lanced, as shown in Fig. 15. In this state, the operating cap 72 is pressed to advance the pusher 71. Then, as shown in Fig. 16, each claw 59a is disengaged from the end of the cutout 44, and then the latch 59 and the lancet holder 5 are moved downward by the urging force of the spring 73, whereby the needle 21 of the lancet 2 pierces the skin 99. In this step, the needle 21 can be prevented from piercing the skin 99 too deeply, by causing the body 20 of the lancet 2 partly to abut on the horizontal wall 32 of the sensor holder 3. When the lancet holder 5 is moved downward, as shown in Fig. 10(e), the protrusion 52 moves within the second groove 43B, so that

the lancet holder 5 advances linearly. Further, after the linear advancing, the protrusion 52 returns to the initial position shown in Fig. 10(a), to be ready to repeat the operation.

【0056】

Immediately after the needle 21 pierces the skin 99, the latch 59 and the lancet holder 5 are properly retracted to remove the needle 21 from the skin 99 by the urging force of the return spring 74. Preferably, the lancing device A comprises a pump or a pump mechanism for exerting negative pressure within the sleeve 40a on piercing. Due to this structure, bleeding from the skin 99 is promoted by the negative pressure so that the skin 99 is less pierced by the needle 21 of the lancet 2, and less damaged.

【0057】

Blood from the skin 99 sticks to the sensor S to be introduced to the reagent 39a of the sensor S. As already described with reference to Fig. 14, since the sensor holder 3 is moved toward the center of the sleeve 40a, i.e. close to the lancing portion, blood reliably sticks to the sensor S.

【0058】

After the above-described lancing operation, the control circuit of the lancing device A calculates glucose level in the blood. The lancing device A may include a display (not shown) such as a liquid crystal display to indicate the calculated value. On the other hand, the used lancet

2 and the sensor holder 3 are removed from the lancing device A to be disposed. Such removing process utilizes a tool for inserting in the sleeve 40a to engage and hold the lancet 2 and the sensor holder 3. In this way, a user needs not to directly touch the used lancet 2 and the sensor holder 3.

【0059】

The present invention is not limited to the above embodiment. Specific structure of the lancing device and the members of the cam mechanism according to the present invention may be modified in various ways. Similarly, details of each step in the method of setting the lancing member in the lancing device according to the present invention may be also modified in various ways.

【0060】

According to the present invention, a lancing member and a holder may be rotated during attaching process of the lancing member to the holder, instead of being rotated after the lancing member is held by the holder. For instance, in attaching the lancing member to the holder, the holder may be rotated before the attachment has been completed, and the lancing member and the holder are rotated together.

【0061】

As described above, according to the present invention, the lancing device may be provided with a motor for rotating a holder and a lancing member, instead of using

a cam mechanism. The motor may be operated by a user using a predetermined switch, for example. However, for improving user's convenience, preferably, the motor may be automatically switched on to be driven when the lancing member is attached to the holder of the lancing device, so that the user needs not to operate a switch.

【0062】

According to the present invention, the lancing member is not necessarily formed integral with the cap. Instead, the lancing member may be formed separate from the cap, and the cap may be attached to the lancing member by an adhesive. In the cam mechanism, it is not necessarily required that the movable member is formed with protrusions and the housing formed with guiding grooves. On the contrary, the movable member may be formed with grooves, and the housing may be formed with protrusions.

【0063】

The holder of a lancing device is not limited to the one in which the lancing member is held by fitting insertion. For instance, the lancing member may be held by a clamping mechanism. The mechanism for advancing the holder may be various in design other than the one utilizing the restoring force of a spring.

【0064】

A lancing device according to the present invention is not limited to be used for measuring the glucose level in blood. Further, a lancing device according to the present invention may be used without attaching an analyzer such as a sensor holder.

【Brief Description of the Drawings】

【Fig. 1】 is a perspective view illustrating an example of a lancing unit, with some part removed, according to the present invention.

【Fig. 2】 is a sectional side view showing the unit of Fig. 1.

【Fig. 3】(a) is a perspective view illustrating an example of a capped lancet, while (b) is a sectional view of the lancet.

【Fig. 4】 is a perspective view illustrating an example of a sensor holder.

【Fig. 5】(a) is a perspective view illustrating an example of a sensor, while (b) is an exploded perspective view of the sensor.

【Fig. 6】 is an exploded view, partly in section, showing the lancing unit of Fig. 1.

【Fig. 7】 is a sectional view illustrating an example of a lancing device according to the present invention.

【Fig. 8】 is an enlarged sectional view of a principal part of the device shown in Fig. 7.

【Fig. 9】 illustrates an example of a cam mechanism

【Fig. 10】(a)-(e) illustrate the guiding operation of protrusions of a lancet holder.

【 Fig. 11 】 is an enlarged sectional view illustrating an earlier stage of attaching the lancet and the sensor holder of the lancing unit to the lancing device.

【Fig. 12】 is a sectional view illustrating an intermediate stage of attaching the lancet and the sensor holder of the lancing member to the lancing device.

【Fig. 13】 is a sectional view showing a principal part of Fig. 12.

【 Fig. 14 】 is an enlarged sectional view illustrating a final stage where the fixing of the lancet and sensor holder of the lancing unit to the lancing device has been completed.

【Fig. 15】 is a sectional view illustrating how to use the lancing device.

【Fig. 16】 is a sectional view illustrating how to use the lancing device.

【Fig. 17】 is a side view illustrating prior art.

【Legend】

- U Lancing Unit
- A Lancing Device
- C Cam Mechanism (Rotation Means)
- 1 Case (Supporting Means)
- 2 Lancet (Lancing Member)

- 4 Housing
- 5 Lancet Holder
- 12 Opening (of the case)
- 20 Body (of the lancet)
- 21 Needle (of the lancet)
- 29 Cap
- 43A First Cam Groove
- 43B Second Cam Groove
- 52 Protrusion

【Identification of the Document】 ABSTRACT

【Abstract】

【Object】


To provide a method of properly setting lancing member in lancing device by simple operation for preventing a needle of the lancing member from pricking a user's finger.

【Means】


A method of setting a lancing member 2 to a lancing device A, the method includes a step for causing the lancing member formed integral with or separately from a cap 29 covering a needle to be held by a holder 5 of the lancing device A, while exposing the needle by detaching the cap 29 from the lancing member. The lancing device A is provided with a rotating means C for rotating the lancing member 2, and a boundary between the cap 29 and the lancing member 2 is broken by rotating the lancing member 2 relative to the cap 29 utilizing the rotating means C,

when the lancing member 2 is about to be held by the holder
5 or after the lancing member is held by the holder.


【Selected Figure】 Fig. 11

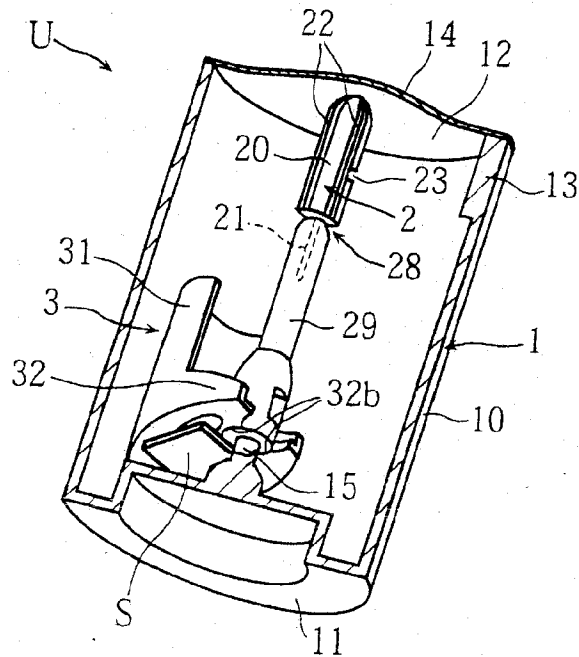


【Fig. 2】

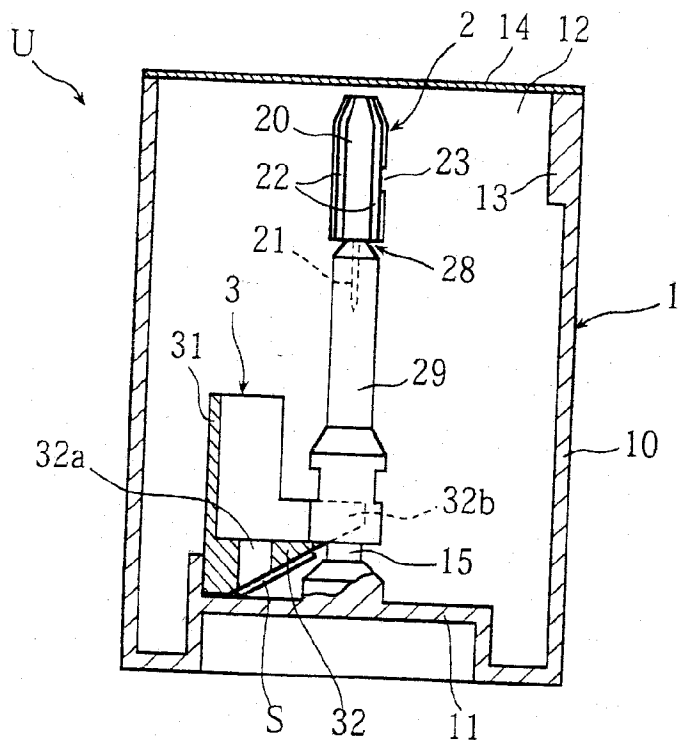


【Fig. 3】

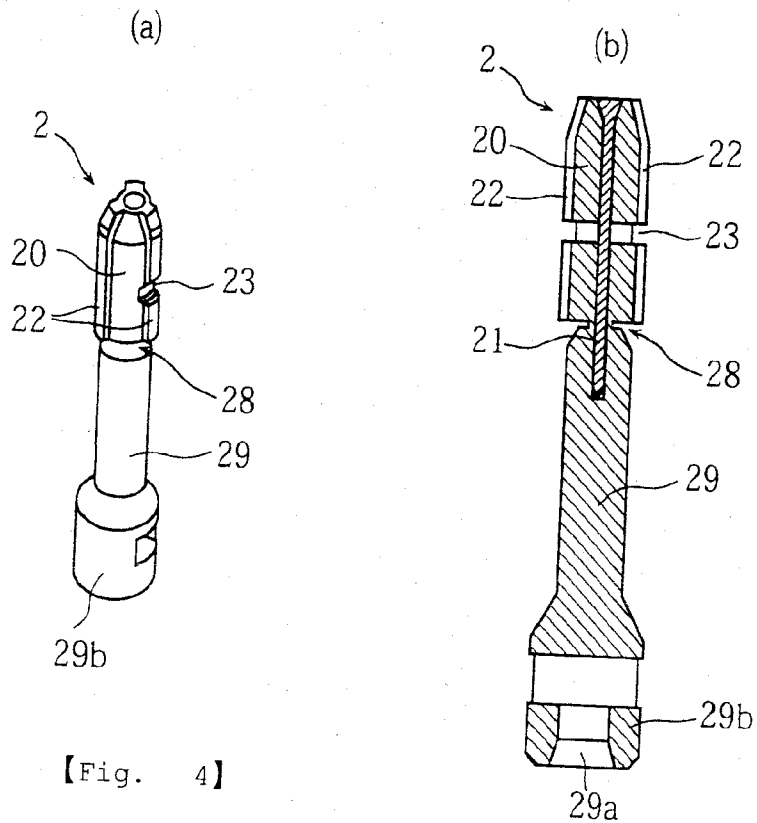


【Fig. 4】

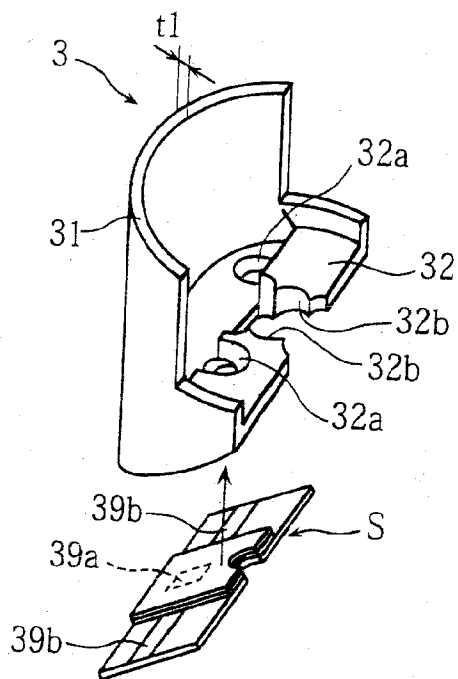


【Fig. 5】

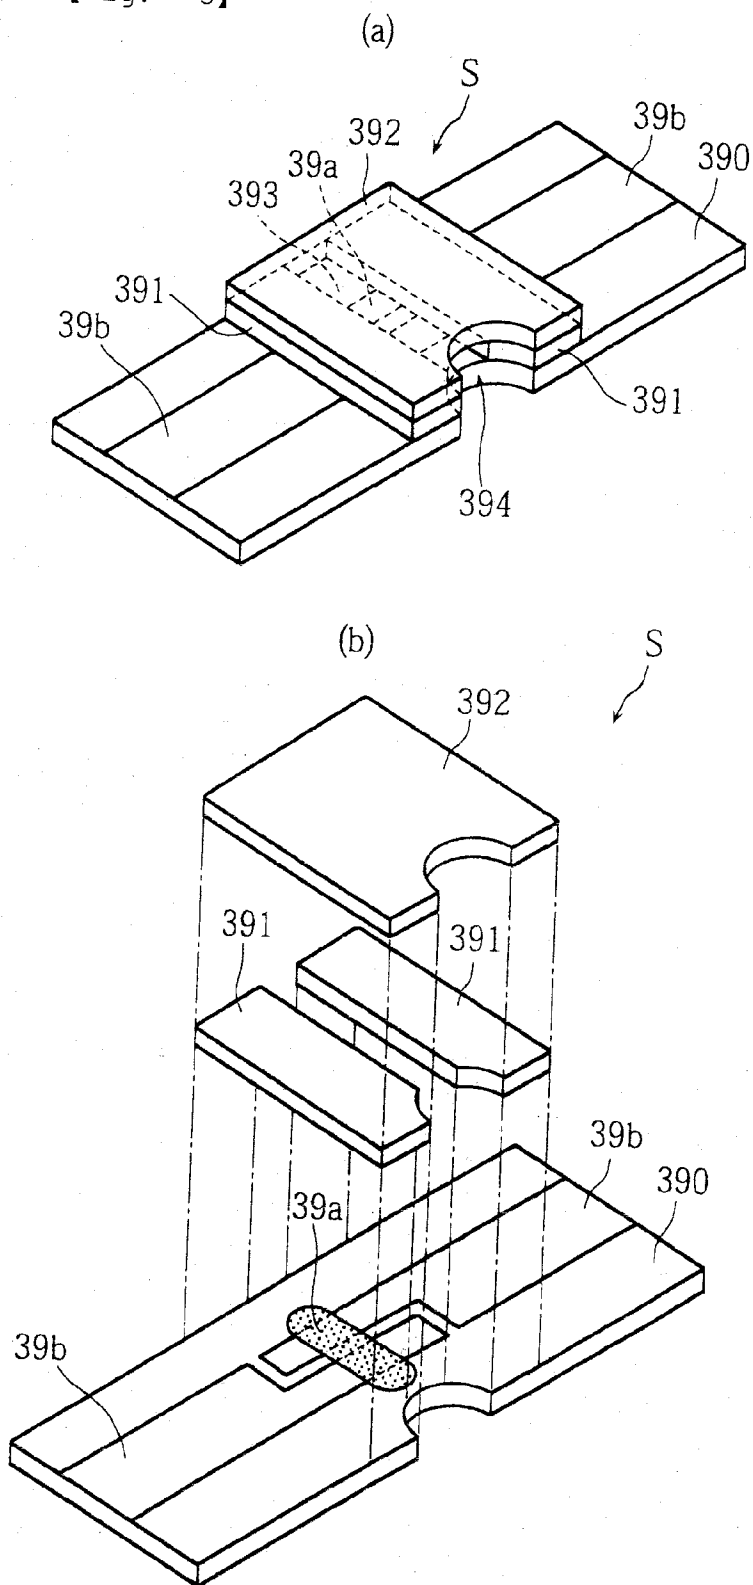


【Fig. 6】

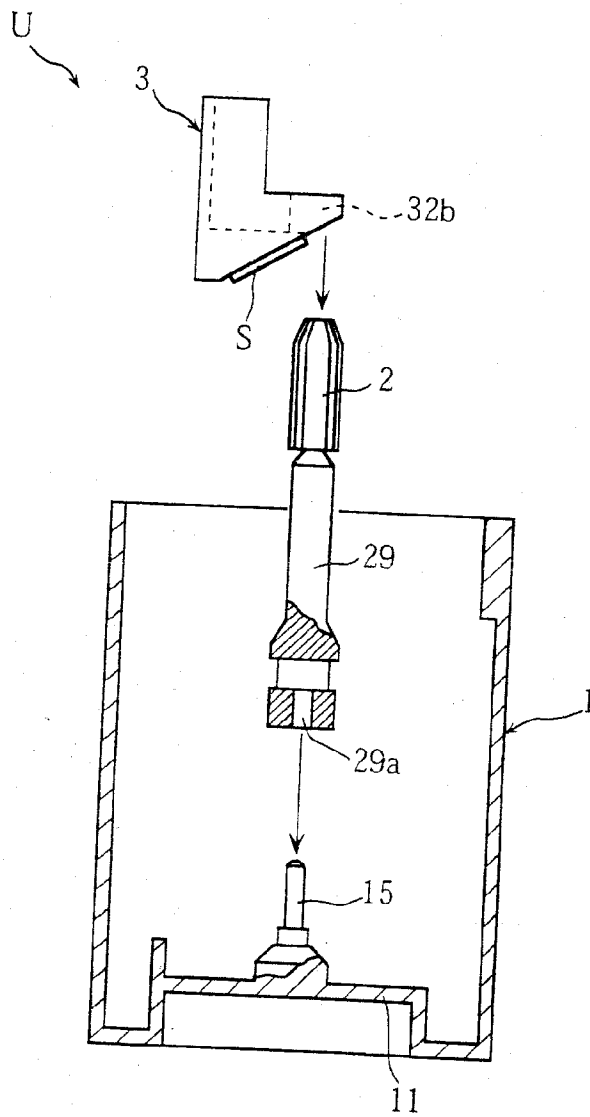


【Fig. 7】

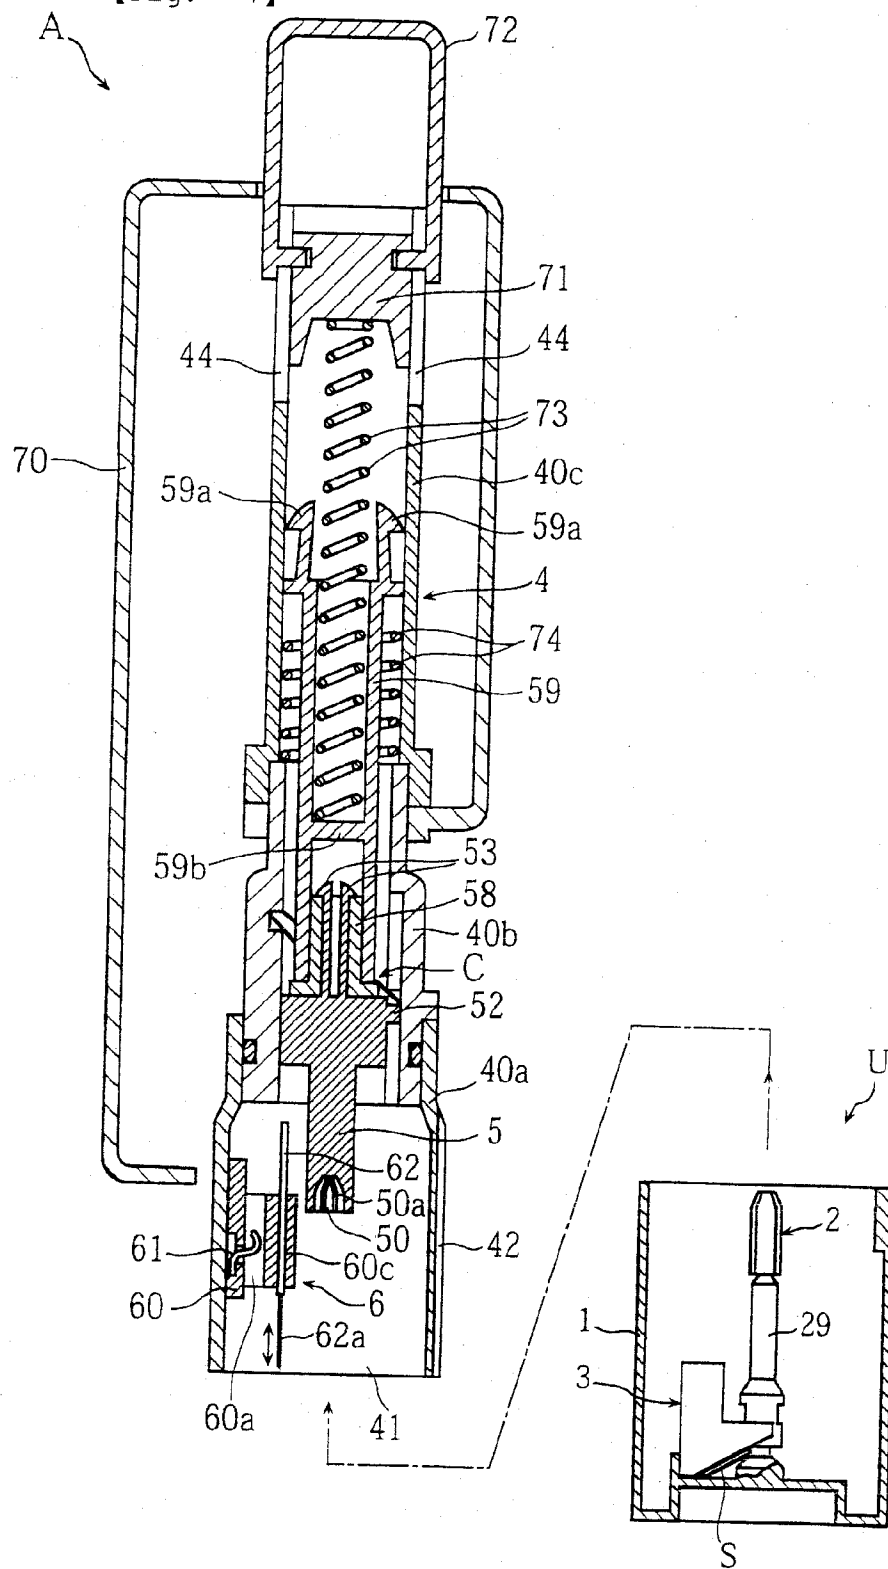


【Fig. 9】

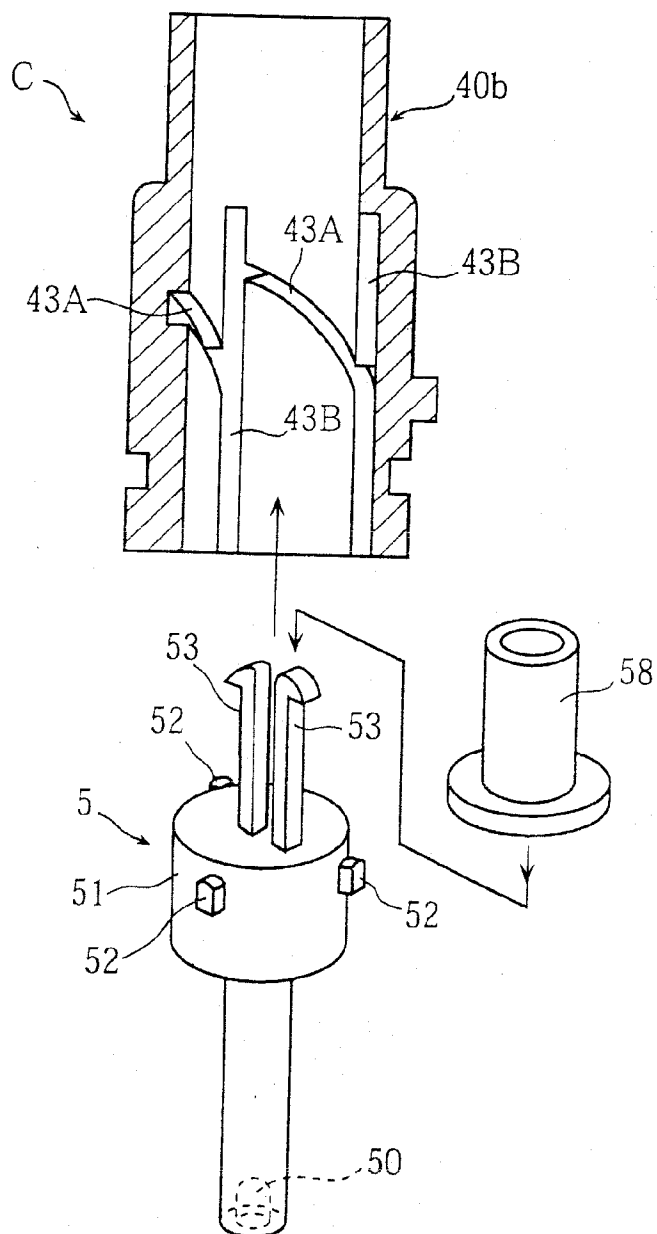


【Fig. 10】

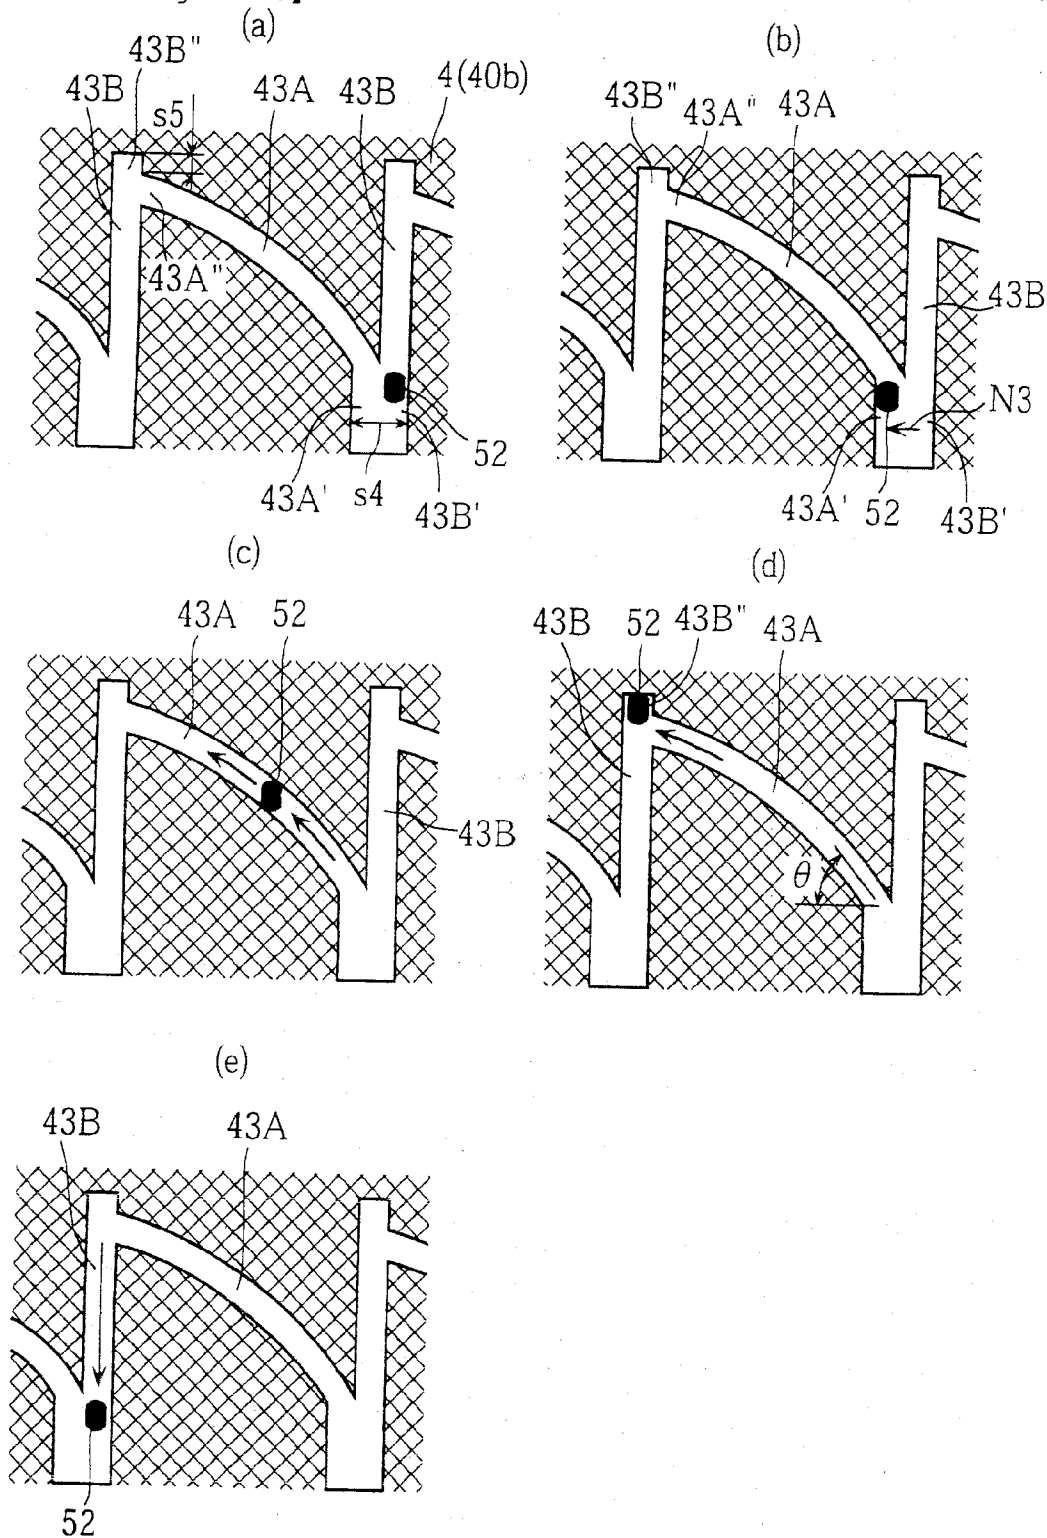


【Fig. 11】

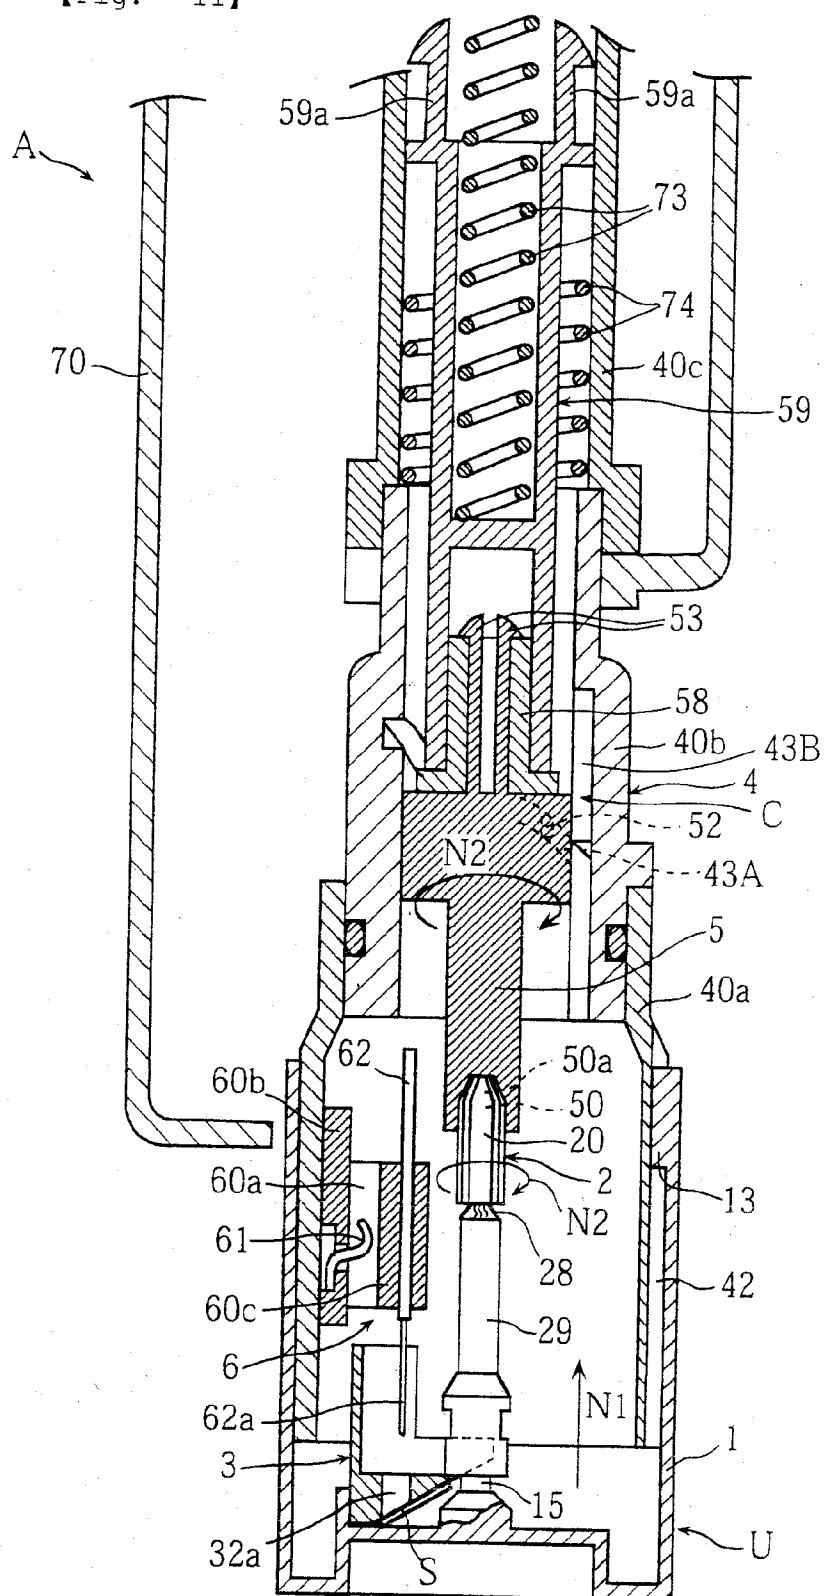


【Fig. 12】

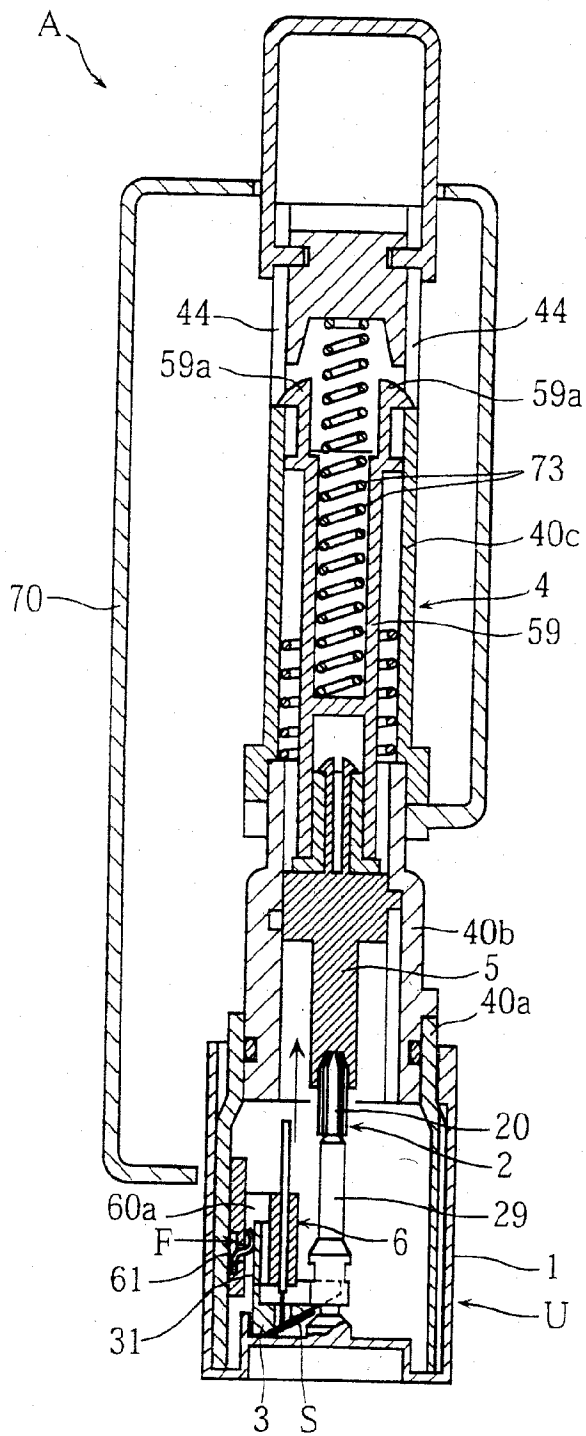


【Fig. 13】

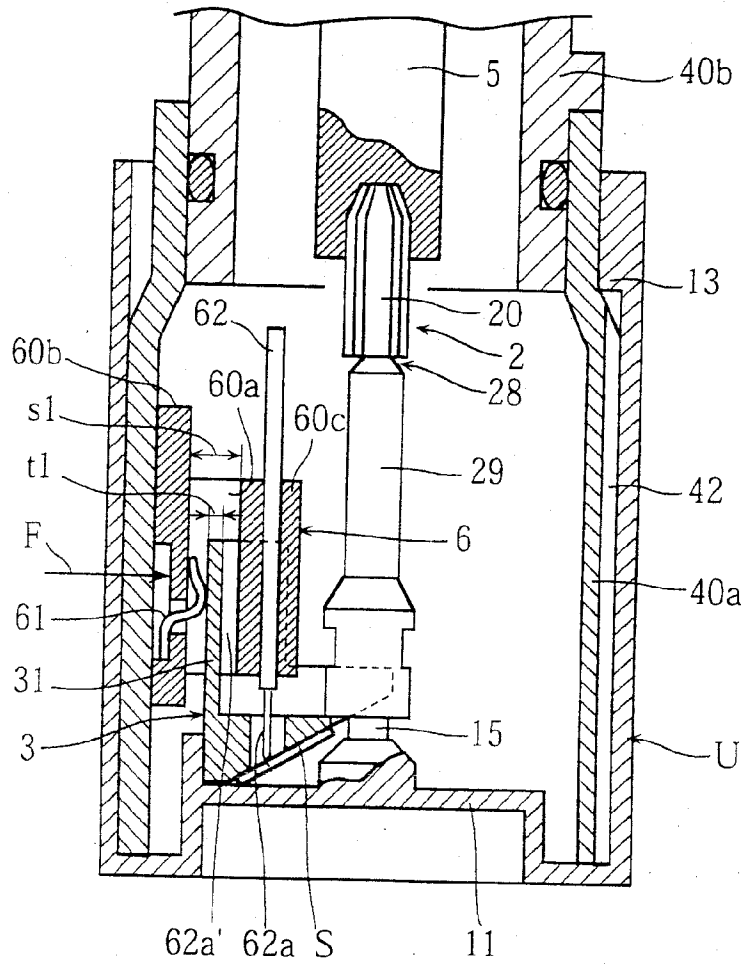


【Fig. 14】

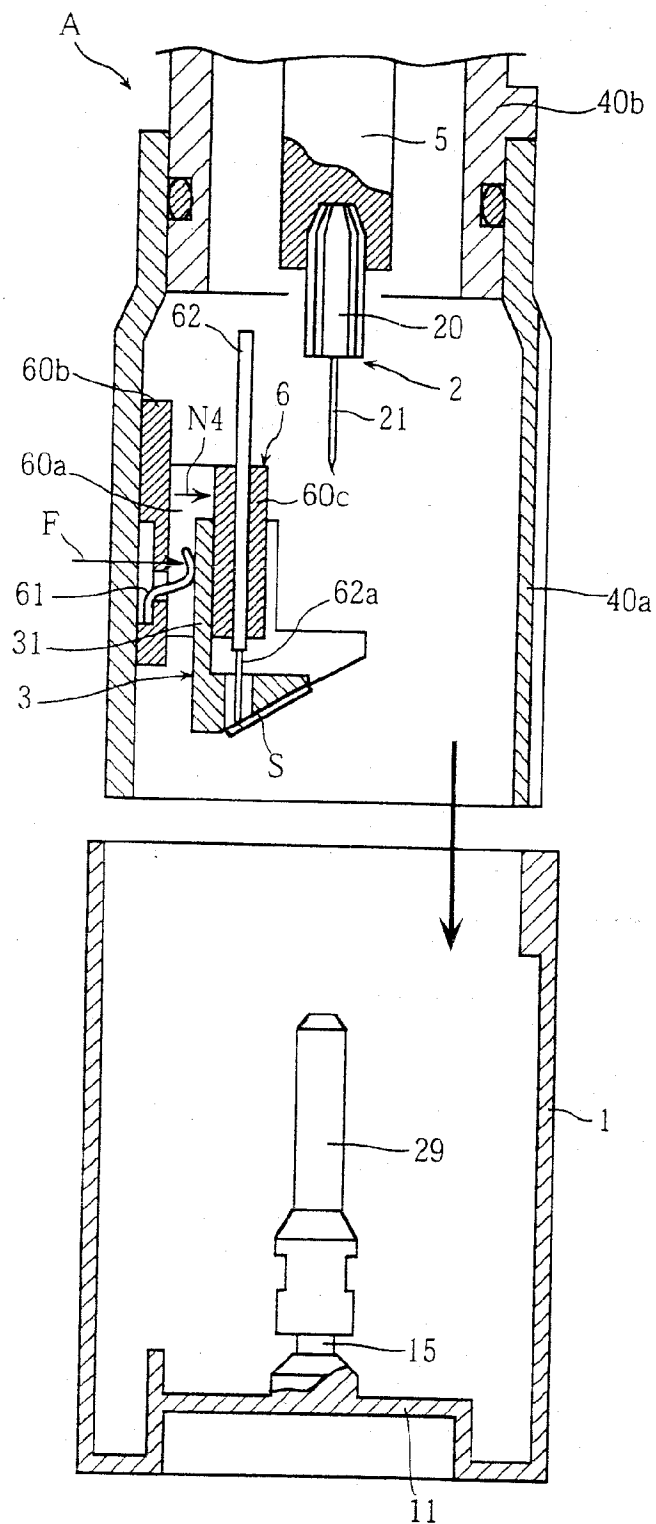


【Fig. 15】

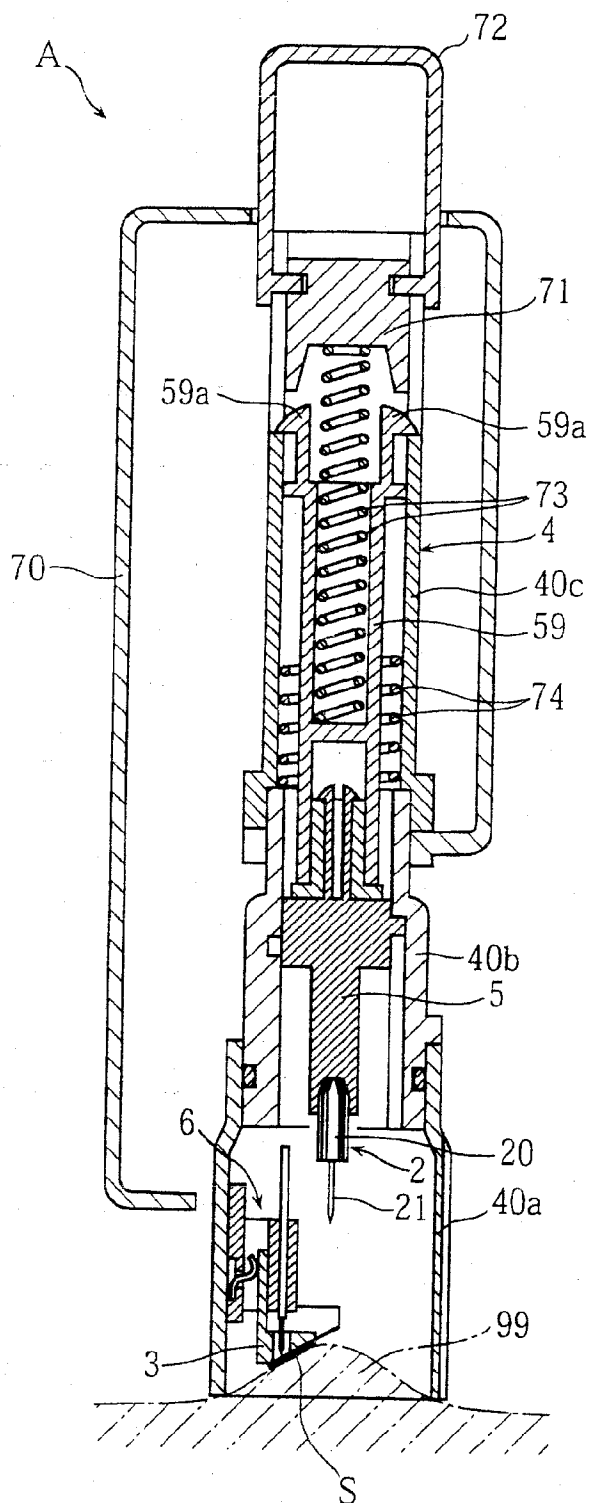

【Fig. 16】

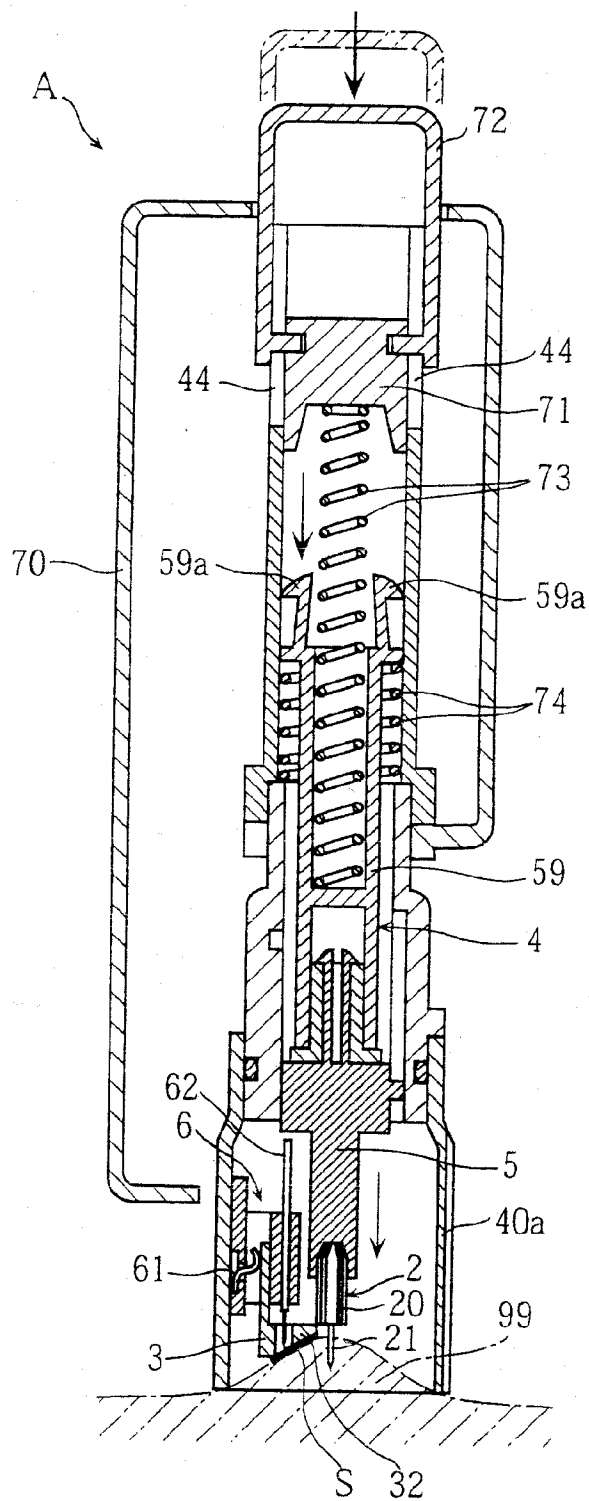

【Fig. 17】

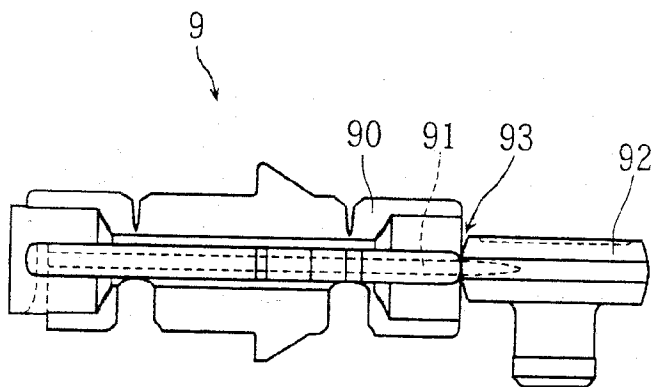

【Fig. 18】